

Overall Dimensions and Performance Parameters of DCL-05



Standard type







Direct installation type

Type	DCL—05				
Performance Parameters	DC24V	AC24V	AC110V	AC380V	AC220V
Motor Power	13W	10W	10W	6W	10W
Rated Current	1.28A	1.50A	0.24A	0.07A	0.16A
Standard Time/Torque	20S/50Nm				
Optional Time/Torque	4S/20Nm 10S/30Nm			4S/20Nm 10S/30Nm 60S/50Nm	
Turning Angle	0 ~ 360° Adjustable				
Available Control Circuit	Types of A、B、C、D、E、F、G、H				
Total Weight	2.0kg				
Insulating Resistance	DC24V/AC24V: 100MΩ/250VDC AC110V/AC220V/AC380V: 100 MΩ/500VDC				
Withstand Voltage Class	DC24V/AC24V: 500VAC 1minutes, AC110V/AC220V:1500VAC 1minutes, AC380V:1800VAC 1minutes				
Protection Class	IP67				
Installation Angle	360° at any angle				
Electric Interface	Two G1/2 Water-proof Cable Connectors, one for power line and one for signal line.				
Ambient Temperature	-30℃ ~ +60℃				
Optional Function	Heater for eliminating moisture				

Standard type

Direct installation type

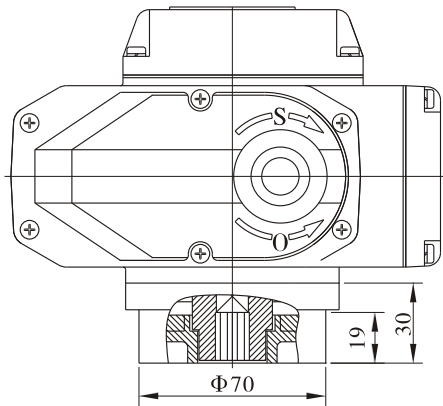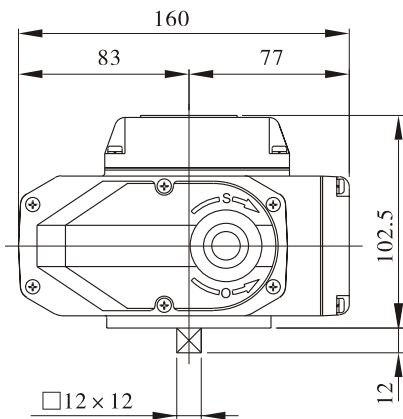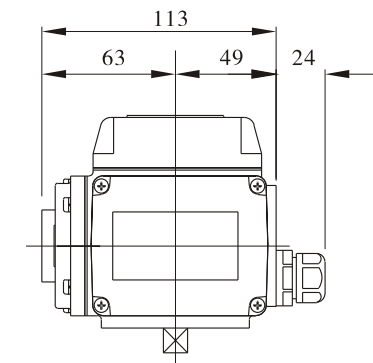

Parameters for direct installation	
Square	□9×9 □11×11 □14×14
Flange	F03 F05 F07
Valve stem	Height≤19mm

