

Overall Dimensions and Performance Parameters of DCL-10




Standard type



Direct installation type

Type Power Performance Parameters	DCL—10				
	DC24V	AC24V	AC110V	AC380V	AC220V
Motor Power	25W	25W	25W	15W	25W
Rated Current	2.03A	2.12A	0.57A	0.10A	0.35A
Standard Time/Torque	30S/100Nm				
Optional Time/Torque	15S/50Nm			15S/50Nm 60S/50Nm	
Turning Angle	0 ~ 90° Adjustable、0 ~ 360° Adjustable				
Available Control Circuit	Types of A、B、C、D、E、F、G、H				
Total Weight	3.0kg				
Insulating Resistance	DC24V/AC24V：100MΩ/250VDC AC110V/AC220V/AC380V：100 MΩ/500VDC				
Withstand Voltage Class	DC24V/AC24V：500VAC 1minutes、AC110V/AC220V:1500VAC 1minutes、AC380V:1800VAC 1minutes				
Protection Class	IP67				
Installation Angle	360° at any angle				
Electric Interface	Two G1/2 Water-proof Cable Connectors, one for power line and one for signal line.				
Ambient Temperature	-30℃ ~ +60℃				
Optional Function	◆ Over-torque Protector ◆ Heater for eliminating moisture				

Standard type

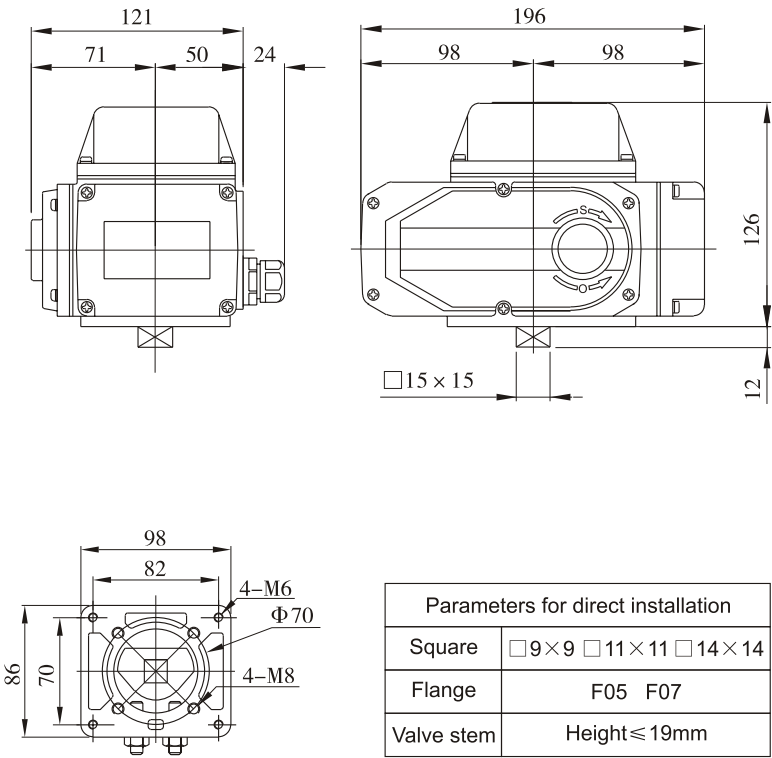

Direct installation type

